

ScreenLine®

# U\_SIZE


The integrated blind,  
for your home.



**Beauty  
beyond reach**



Beauty beyond

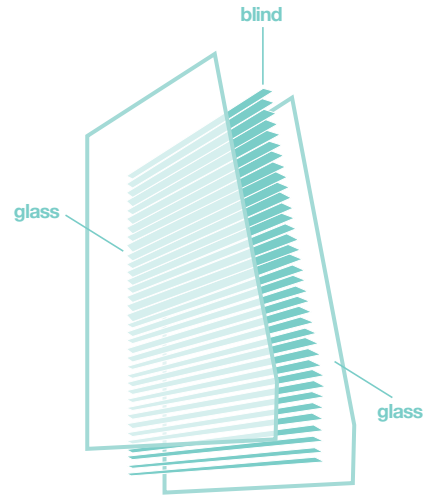

- > **Clean for life**
- > **No risk of damage**
- > **Maintenance free**
- > **Durable components**
- > **Long life**
- > **Excellent light and solar control characteristics**
- > **Guarantees privacy**
- > **Linear design allows greater use of internal area**

nd reach

The beauty of a stylish blind for interiors, enshrined between two glass panes in your window, with a unique performance and a never-ending lifespan.

ScreenLine  
**U\_SIZE**  
The integrated blind,  
for your home.







The integrated blind,  
for your home.

You can choose between  
**Venetian** or **Pleated**  
**models**, with **11 colours**  
and **3 control systems**  
available in order to create the  
ideal solution that will make  
your rooms more pleasing and  
comfortable.

ScreenLine  
**U\_SIZE**  
The integrated blind,  
for your home.







For windows, doors or French windows.

Up-and-over, sliding or casement windows, made of **wood**, **aluminium**, **PVC** or **wood-aluminium**.

In our range you will find the right solution for the **comfort** and **beauty** of your home.

ScreenLine  
**U\_SIZE**  
The integrated blind,  
for your home.







ScreenLine  
**U\_size**  
The integrated blind,  
for your home.





ScreenLine  
**U\_size**  
The integrated blind,  
for your home.







ScreenLine  
**U\_size**  
The integrated blind,  
for your home.








ScreenLine  
**U\_size**  
The integrated blind,  
for your home.



**SL20C-22C Venetian**  
warm edge spacer bar  
standard for 22-mm cavity

## “C” Venetian system Feasibility chart

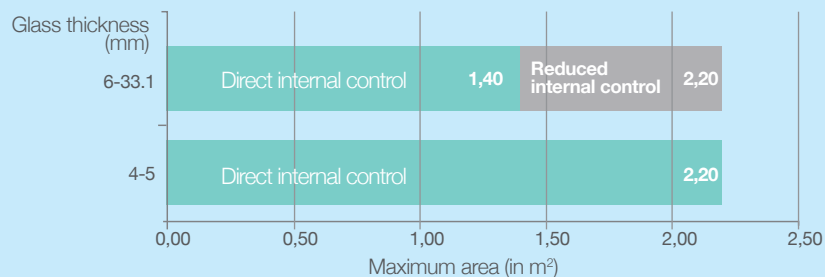


with W = from 300 to 350 mm, H max = 850 mm  
with W = from 351 to 400 mm, H max = 1550 mm  
with W = from 401 to 450 mm, H max = 1950 mm  
W max 2000 mm - H max 2350 mm




**SL20F-22F Venetian**  
warm edge spacer bar  
standard for 22-mm cavity

## “F Touch” Venetian system Feasibility chart

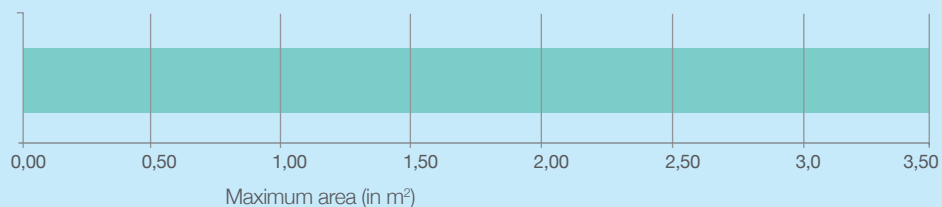

with W = from 250 to 300 mm, H max = 950 mm  
with W = from 301 to 350 mm, H max = 1700 mm  
with W = from 351 to 400 mm, H max = 2100 mm  
L max 2000 mm - H max 2500 mm

### Available colours

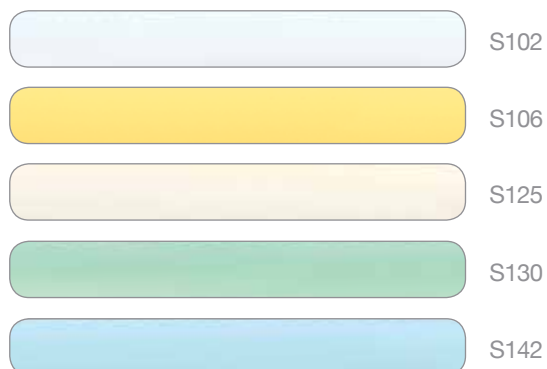



# Venetian

Frontal knob



External motor



Transmission device



Solar panel



Radio remote control



Battery charger




ScreenLine  
**U\_size**  
The integrated blind,  
for your home.





**SL20C-22C pleated**  
warm edge spacer bar  
standard for 22-mm cavity

## “C” Pleated system Feasibility chart

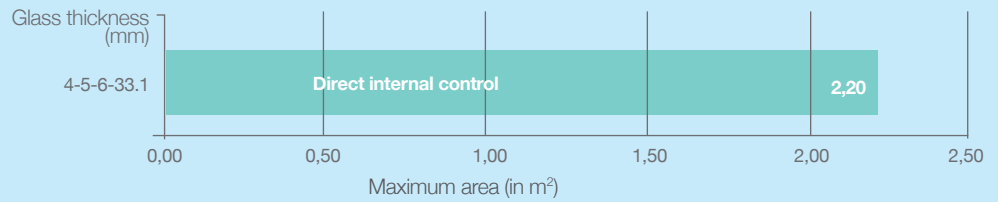


with W = from 300 to 350 mm, H max = 850 mm  
with W = from 351 to 400 mm, H max = 1550 mm  
with W = from 401 to 450 mm, H max = 1950 mm  
L max 2000 mm - H max 2350 mm



**SL20F-22F pleated**  
warm edge spacer bar  
standard for 22-mm cavity

## “F Touch” Pleated system Feasibility chart

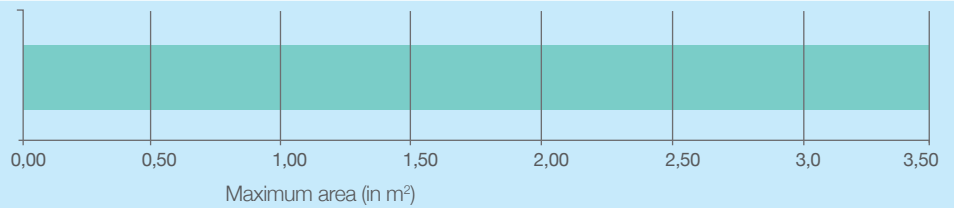


with W = from 250 to 300 mm, H max = 950 mm  
with W = from 301 to 350 mm, H max = 1700 mm  
with W = from 351 to 400 mm, H max = 2100 mm  
L max 2000 mm - H max 2500 mm



**SL20S-22S pleated**  
warm edge spacer bar  
standard for 22-mm cavity


## “S” Pleated system Feasibility chart

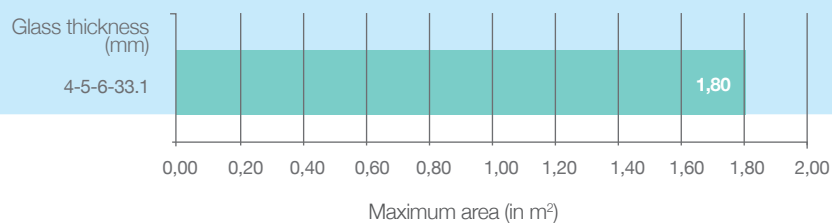

### Available colours



C000 white



C010 beige

External motor



Transmission device



Solar panel



Radio remote control



Battery charger



# Pleated



ScreenLine  
**U\_size**  
The integrated blind,  
for your home.

# pellini<sup>®</sup>industrie

www.pellini.net



Pellini SpA was founded in 1974 in Codogno, Northern Italy, as a craftsman, family-owned company producing venetian blinds, folding doors, mosquito nets and awnings.

In 1984, Pellini started to co-operate with a leading multinational company manufacturing venetian blinds for interiors; this allowed Pellini to move away from a (since then) local market and to emerge in the national scene.

In 1990, the company set up a project for integrating a blind within insulating glass, achieving the raising and lowering of a blind encapsulated within a double glazing unit whilst maintaining the latter's integrity. All their efforts were rewarded in 1992, with the introduction of the first system in the ScreenLine<sup>®</sup>

range - a system based on rotational transmission of motion obtained by the coupling of internal and external magnets. In 1994, the historical production lines for awnings and mosquito nets were decommissioned in order to maximise capacity for the engineering and manufacture of new, increasingly more advanced ScreenLine<sup>®</sup> systems and increasingly more performing technical blinds for interiors.

Today, the company preserves the old handicraft attitude in its "made-to-measure" artifacts, which are perfected by hands careful to details rather than being mass produced; at the same time, it operates on a worldwide scale and is an acknowledged leader in the field of sun shading systems.



ISO 9001: 2008 Certificato No. 2351/2

SL20C - SL27C



pellini<sup>®</sup>industrie  
www.pellini.net